




030 - PTFE - 1SSB

PTFE hose for medium pressure from 75 up to 205 bar (from 1000 to 2900 psi)

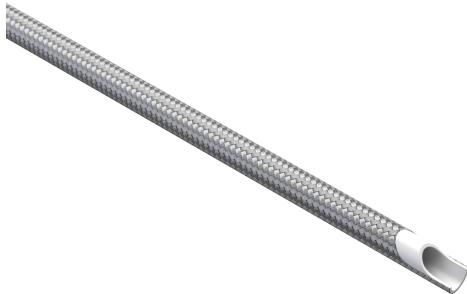

FEATURES

Inner Tube

Polytetrafluoroethylene

Reinforcement

One braid of stainless AISI 304 wire

Cover

N/A

Applications

Aggressive chemicals transfer systems - Compressed air and gases
- High or low temperature fluid or gas transfer

Features

Pure PTFE tube material: lightweight resistant to almost all chemicals gases and solvents - Stainless steel braid / cover to support medium pressure requirements - Hose comes in random length coils

Description

Lightweight smoothbore hose for standard industrial use especially for high or low temperature and aggressive chemical applications: including some gases (there will be a level of gas permeation which should be taken into account) - Care should be taken to ensure proper fitting and ferrule compatibility, we recommend to contact our sales office for fittings selection - Hose not suitable for continuous hydraulic impulse applications. Above 130 °C (266 °F) there will be a reduction in maximum working pressure: reduce maximum working pressure by 1% for each 2 °C (3.6 °F) above 130 °C (266 °F) - Hose suitability must be checked when discharge of electrical static build up is required.

Temperature Range

-60 °C to 260 °C (-76 °F to 500 °F)

| Part no. | DN | Inches | Dash | ID (mm) | OD (mm) | WP (bar) | BP (bar) | ID (inch) | OD (inch) | WP (psi) | BP (psi) | SF | BR (mm) | BR (inch) | Weight (gr/m) | Weight (lb/ft) | Ferrule standard | Ferrule A316L |
|----------|------|--------|------|---------|---------|----------|----------|-----------|-----------|----------|----------|-----|---------|-----------|---------------|----------------|------------------|---------------|
| 0301 | DN5 | 3/16 | -3 | 4.9 | 7.8 | 205 | 820 | 0.193 | 0.307 | 2900 | 11600 | 4:1 | 35 | 1.38 | 83 | 0.056 | SAG111 | |
| 0302 | DN6 | 1/4 | -4 | 6.5 | 9.2 | 180 | 720 | 0.256 | 0.362 | 2600 | 10400 | 4:1 | 45 | 1.77 | 89 | 0.060 | SAG121 | |
| 0303 | DN8 | 5/16 | -5 | 8.0 | 11.0 | 170 | 680 | 0.315 | 0.433 | 2400 | 9600 | 4:1 | 50 | 1.97 | 110 | 0.074 | SAG131 | |
| 0304 | DN10 | 3/8 | -6 | 9.5 | 12.7 | 155 | 620 | 0.374 | 0.500 | 2200 | 8800 | 4:1 | 55 | 2.17 | 160 | 0.108 | SAG141 | |
| 0305 | DN12 | 1/2 | -8 | 12.8 | 16.1 | 120 | 480 | 0.504 | 0.634 | 1700 | 6800 | 4:1 | 70 | 2.76 | 188 | 0.126 | SAG151 | |
| 0306 | DN16 | 5/8 | -10 | 16.6 | 19.8 | 85 | 340 | 0.654 | 0.780 | 1200 | 4800 | 4:1 | 130 | 5.12 | 251 | 0.169 | SAG161 | |
| 0307 | DN20 | 3/4 | -12 | 19.8 | 23.0 | 75 | 300 | 0.780 | 0.906 | 1000 | 4000 | 4:1 | 190 | 7.48 | 291 | 0.196 | SAG171 | |
| 0308 | DN25 | 1 | -16 | 25.4 | 28.8 | 75 | 300 | 1.000 | 1.134 | 1000 | 4000 | 4:1 | 270 | 10.63 | 410 | 0.275 | SAG181 | |

Dimensions and values shown may be changed without prior notice to improve product performances and reliability.

Transfer Oil S.p.A. assumes no liability on mistakes nor errors appearing in this spec sheet.

Document date: 24/02/2026

www.transferoil.com